


## DATASHEET MC-CARTRIDGE

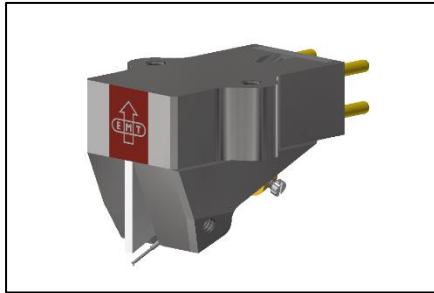

### JSD P6.0

Reference stereo cartridge with high-density-body

Specification	
Diamond:	MF HP
Cantilever:	Sapphire
Transducer:	MC Stereo
Magnet:	AlNiCo, gold-plated
Body:	High density, rhodium plated
Connection:	1/2" - 4pin
Vertical Tracking Angle:	23°
Weight:	18g
Tracking force:	2,4g
Output voltage:	1.05mV @ 5cm/s
Compliance:	12µm/mN
Frequency response: ±2dB:	20 - 30'000Hz 40 - 12'500Hz
FIM distortion	≤0,3%
Impedance:	2x 24Ω
Recommended load:	200 - 300Ω
Nomenclature	
JSD:	Jubilee Stereo Diamond
MF:	Multi-Facet diamond shape
HP:	High polish grade