


## DATASHEET MC-CARTRIDGE

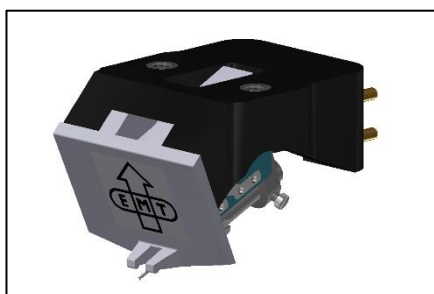

TMD 75/15

TMD 75/25

TND 75/65

Mono cartridge with magnesium/aluminium body

Discontinued 2018

Specification	TMD 75/15	TMD 75/25	TND 75/65
Diamond:	SPH 15µm	SPH 25µm	SPH 65µm
Cantilever:	Aluminium		
Transducer:	MC Mono		
Magnet:	AlNiCo, nickel-plated		
Body:	Aluminium, black anodized, magnesium inlay		
Connection:	1/2" - 4pin		
Weight:	12g		
Tracking force:	2,4g		
Output voltage:	1.05mV @ 5cm/s		
Compliance:	12µm/mN		
Frequency response: ±2dB:	20 - 20'000Hz 40 - 12'500Hz	20 - 18 '000Hz 40 - 12'500Hz	20 - 16'000Hz 40 - 12'500Hz
Impedance:	24Ω		
Recommended load:	200 - 300Ω		
Successor:	HMD 025		
<b>Nomenclature</b>			
TMD:	Tondose Microgroove Diamond		
TND:	Tondose Normal-groove Diamond		
75:	75 <sup>th</sup> anniversary edition		
15/25/65	Stylus tip radius in microns		